Crawley Borough and Upper Mole Catchment Level 1 Strategic Flood Risk Assessment

Final Report

September 2020

www.jbaconsulting.com

Crawley Borough Council &
Horsham District Council

This report fulfils the Level One SFRA requirements .

To meet the objectives of the SFRA, the following outputs have been prepared:

- Assessment of all potential sources of flood ing
- Assessment of the potential impact of climate change on flood risk
- An assessment of surface water management issues and the application of Sustainable Drainage Systems (SuDS)
- A review and update of new and amended data sources

Summary of Assessment

JBA

The Council should consult the latest version of the Flood Risk Assessment: Local Planning Authorities planning applications for proposed developments at risk of flooding.

The Council will consult the relevant statutory consultees as part of the planning application assessment and they may, in some cases, also contact non-statutory consultees (e.g. Thames Water) that have an interest in the planning application.

Minimum finished floor levels for development that does not include sleeping accommodation on the ground floor should normally be set to whichever is higher of the following:

Finished floor levels for

at the time of preparation. This relates both to the current ri sk of flooding from rivers and surface water and where available the potential effects of future climate change . It is important that anyone using this document check for updated policy and guidance documents and flood risk information

JBA

Abbreviations and glossary of terms

	Definition
AEP	Annual Exceedance Probability

RBMP	River Basin Management Plan
Resilience measures	Measures designed to reduce the impact of water that enters property and businesses; could include measures such as raising electrical appliances
Resistance measures	Measures designed to keep flood water out of properties and businesses; could include flood guards for example.
RoFSW	Risk of Flooding from Surface Water
SFRA	Strategic Flood Risk Assessment
SHLAA	
SFHD	

1 Introduction

1.1 Purpose of the Strategic Flood Risk Assessment

This Strategic F lood Risk Assessment (SFRA) 20 20 document supersedes the pr evious Crawley Borough Council Level 1 SFRA (20 14) an d the Horsham District Council Level 1 SFRA (2010). The SFRA study area is shown in Figure 1-1. Fo r this assessment, the study area consists of the Crawley Borough Council administrative boundary and the section of the Upper Mole Catchment which is situated within the administrative boundary of Horsham District Council. For the purpose of this report, this region will be referred to as the study area , and the contents and advice of this SFRA relate only to this area .

At the time of writing, Horsham District is also in the process of producing an updated SFRA, prepared by AECOM Ltd. for the Adur and Arun catchment s. This study will not include the Upper Mole catchment area.

Throughout the report , hyperlinks to relevant documents, policies and guidance have been provided and are highlighted in bold green text.

The main purpose of th is SFRA update is to prepare a document that provide s comprehensive and supporting evidence for the emerging Local Plan Review s, both in terms of guiding site allocations and in the determination of planning applications . The Crawley Borough Local Plan and Horsham District Local Plan were both adopted in 2015 , and the respective Local Plan Review s will revisit the adopted Local Plan s to make sure that sufficient housing , employment and supporting infrastructure will be planned to meet the needs of the area. The SFRA update was also required to be compliant with the latest guidance described in the 201 9 update to the National Planning Policy Framework (NPPF), support the selection of site allocations in the Local Plan Review and to provide information and guidance to be used in the preparation of Flood Risk Assessments (FRAs) in support of site specific planning applications . The evidence in this SFRA shall also be used to support the formulation of Ne ighbourhood Plans.

An updated NPPF was published in February 2019 (further updated June 2019) and ow these are expected to be applied. This updated Framework replaces the previous versions of the NPPF published in July 2018 and M1 841.92 re W* n BT /F2 9.96ch -3( )] 2n871 0 595.32 841.92 re W* n BT /F

Identif ication of opportunities to reduce flood risk

High-level screening of proposed development sites against flood risk information

Identification of f lood defence infrastructure.

1.4 Structure of this report

Table 1-1: SFRA report contents

12. Level 1 summary assessment of potential

Environment Agency flood map updates

New flood defence schemes etc.

The Environment Agency regularly reviews their flood risk mapping, and it is important that they are approached to determine whether updated (more accurate) info rmation is available prior to commencing a detailed Flood Risk Assessment. It is recommended that the SFRA is reviewed internally, in line with the Environment

SFRA, allowin g a cycle of review of any updated data by checking with the above bodies for any new information.

2 Flood risk policy and strategy

2.1 Roles and responsibilities for Flood Risk Management in the study area

There are different organisations that cover Crawley Borough and Horsham District that have responsibilities for flood risk management, known as Risk Management Authorities (RMAs). These are shown on Table 2-1, with a summary of their responsibilities.

It is important to note that land and property owners are responsible for the maintenance of watercourses either on or next to their properties. Property owners are also responsible for the protection of their properties from flooding as well as other management activities, for example by maintaining riverbeds/banks, controlling invasive species and allowing the flow of water to pass without obstruction. More information can be found in the Environment Agency publication 'Owning a

Risk Management Authority	Strategic Level	Operational Level	Planning role
Crawley Borough Council and Horsham District Council	Local Plans as Local Planning Authorities	Determination of Planning Applications as Local Planning Auth orities Planning enforcement	

2.2.4 Environmental Permitting

The

Provide useful and specific local information to inform Flood Risk Assessments within the local

Table 2-2: National, regional and local key flood risk policy and strategy documents

Document, lead author and date

2.3.1 The National Flood and Coastal Erosion Risk Management Strategy for England (2011)

The National Flood and Coastal Erosion Risk Management Strategy (FCERM) for England provides the overarching framework for future action by all risk management authorities to tackle flooding and coastal erosion in England. The new Strategy has been in preparation since 2018. The Environment Agency brought together a wide range of stakeholders to develop the strategy collaboratively. The Strategy is much more ambitious than the previous one from 2011 and looks ahead to 2100 and the action needed to address the challenge of climate change.

The Strategy has been split into 3 high level ambitions: climate resilient places,

The maps identify NFM opportunities on different catchment scales:

National River Ba sin Districts

Rive(s Basin) Districts showing Management Catchments

Management Catchments showing Water Body Catchments

Water Body Catchments .

These catchments cross boundaries between the SFRA study area and other neighbouring authorities. Discussions about NFM shou129(15n)-5(e)6(i)-4(g)-3(h)-129(shou)-3(129(15n)-

2.3.5 Catchment Flood Management Plans

Catchment Flood Management Plans (CFMPs) are high-level strategic plans providing

Gatwick Sub -

Figure 3-3: The Exception Test

There are two parts to demonstrating a development passes the Exception Test:

1.

Local planning authorities will need to consider what criteria they will use to assess

Ownership or landowner agreement in itself is not acceptable as a reason not to consider alternatives.

The SFRA guide to using technical data in Appendix L shows where the Sequential and Exception Test may be required for the datasets assessed in the SFRA, and how to interpret different levels of concern with the datasets, recommending what development might be appropriate in what situations.

3.3.2 The Exception Test

If, following application of the Sequential Test it is not possible for the development to be located in areas with a lower probability of flooding the Exception Test must then be applied if required (as set out in Table 3 of the NPPG). Developers are required to apply the Exception Test to all applicable sites (including strategic allocations).

The applicant will need to provide information that the application can pass both parts of the Exception test:

Applicants should refer to wider sustainability objectives in Local Plan Sustainability Appraisals. These generally consider matters such as biodiversity, green infrastructure, historic environment, climate change adaptation, flood risk, green energy, pollution, health, transport etc.

Applicants should detail the sustainability issues the development will address and how these will outweigh the flood risk concerns for the site e.g. by facilitating wider regeneration of an area, providing community facilities, infrastructure that benefits the wider area etc.

4.4

is provided in t he Environment Agency publication, Adapting to Climate Change: Advice for Flood and Coastal Erosion Risk Management Authorities.

4.4.2 Which peak river flow allowance to use?

The Flood Zone and flood risk vulnerability classification should be considered when deciding which allowances apply to the development or the plan. Vulnerability classifications are found in the NPPG. The Environment Agency guidance states the following :

Table 4-2: Flood Zone 2 peak river flow allowance guidance

Vulnerability classification	Central	Higher Central	Upper end
Essential infrastructure			
Highly vulnerable			
More vulnerable			
Less vulnerable			
Water compatible	None		

Table 4-3: Flood Zone 3a peak river flow allowance guidance

Vulnerability classification	Central	Higher Central	Upper end
Essential infrastructure			
Highly vulnerable	Development not permitted		
More vulnerable			
Less vulnerable			
Water compatible			

Table 4-4: Flood Zone 3b peak river flow allowance guidance

Vulnerability classification	Central	Higher Central	Upper end
Essential infrastructure			
Highly vulnerable	Development not permitted		
More vulnerable			
Less vulnerable			
Water compatible			

Currently there is n o guidance on considering the impact of climate change on development located within Flood Zone 1.

4.5 Peak rainfall intensity allowance

Climate change is predicted to result in wetter winters and increased summer storm intensity in the future. This increased rainfall intensity will affect land and urban

Increased mean winter temperatures of up to 7ºC or a decrease of up to 1ºC by 2099.

Summer rainfall could decreas e by over 80% or it could increase up to 20% by 2099.

Winter rainfall could decrease by up to 10% or it could increase over 60% by 2099.

Whilst changes in trends and mean values is important, the more influential effect of climate change with respect to fl ood risk and drought is to increase the chance of occurrence and severity of more extreme wet and dry events.

development is sho wn to be within this area, further investigation should be undertaken as part of a detailed site - specific FRA to define and confirm the extent of Flood Zone 3b.

If existing development or infrastructure is shown in Flood Zone 3b, additional

Mapping of surface water flood risk in the study area has been taken from the Risk of Flooding from Surface Water (RoFSW) published online by the Environment Agency. These maps are intended to provide a consistent standard of assessment for surface water flood risk across England and Wales in order to help LLFAs, the Environment Agency and any potential developers to focus their management of surface water flood risk. The different surface water risk categories used in the RoFSW mapping are defined in Table 5-2.

The RoFSW is derived primarily from identifying topographical flow paths of existing watercourses or dry valleys that contain some isolated ponding locations in low lying areas. They provide a map which displays different levels of surface water flood risk depending on the annual probability of the land in question being inundated by surface water.

Table 5-2: Surface water risk categories used in the RoFSW mapping

Category	Definition
High	Flooding occurring as a result of rainfall with a greater

5.4.2 Critical drainage areas

Critical drainage areas are defined by the Town and Country Planning (General

areas within both rural and urban environments and are typically w ere man made drainage infrastructure has been identified as at critical risk of failure, resulting in flooding.

No critical drainage areas have been identified within the study area.

5.5 Groundwater

GeoSmart have developed a range of Groundwater Flood Map products at the national scale. The 5m resolution GeoSmart Groundwater Flood Map has been used within the SFRA. The modelling incorporates a 5m Digital Terrain Model, with

This provides info rmation and guidance on how West Sussex LLFA, as a statutory consultee, will review drainage strategies and surface water management provisions associated with applications for development and it also sets out the policy requirements West Sussex County Cou ncil has for sustainable drainage.

Thames River Basin District River Basin Management Plan (2015)

This p rovides information on the catchment -wide strategy for flood risk management. It should be ensured that any flood risk management measures are consistent with the strategy.

December 2008 - Fluvial flooding reported from the River Mole

Figure 6-1: Elevation across the SFRA study area

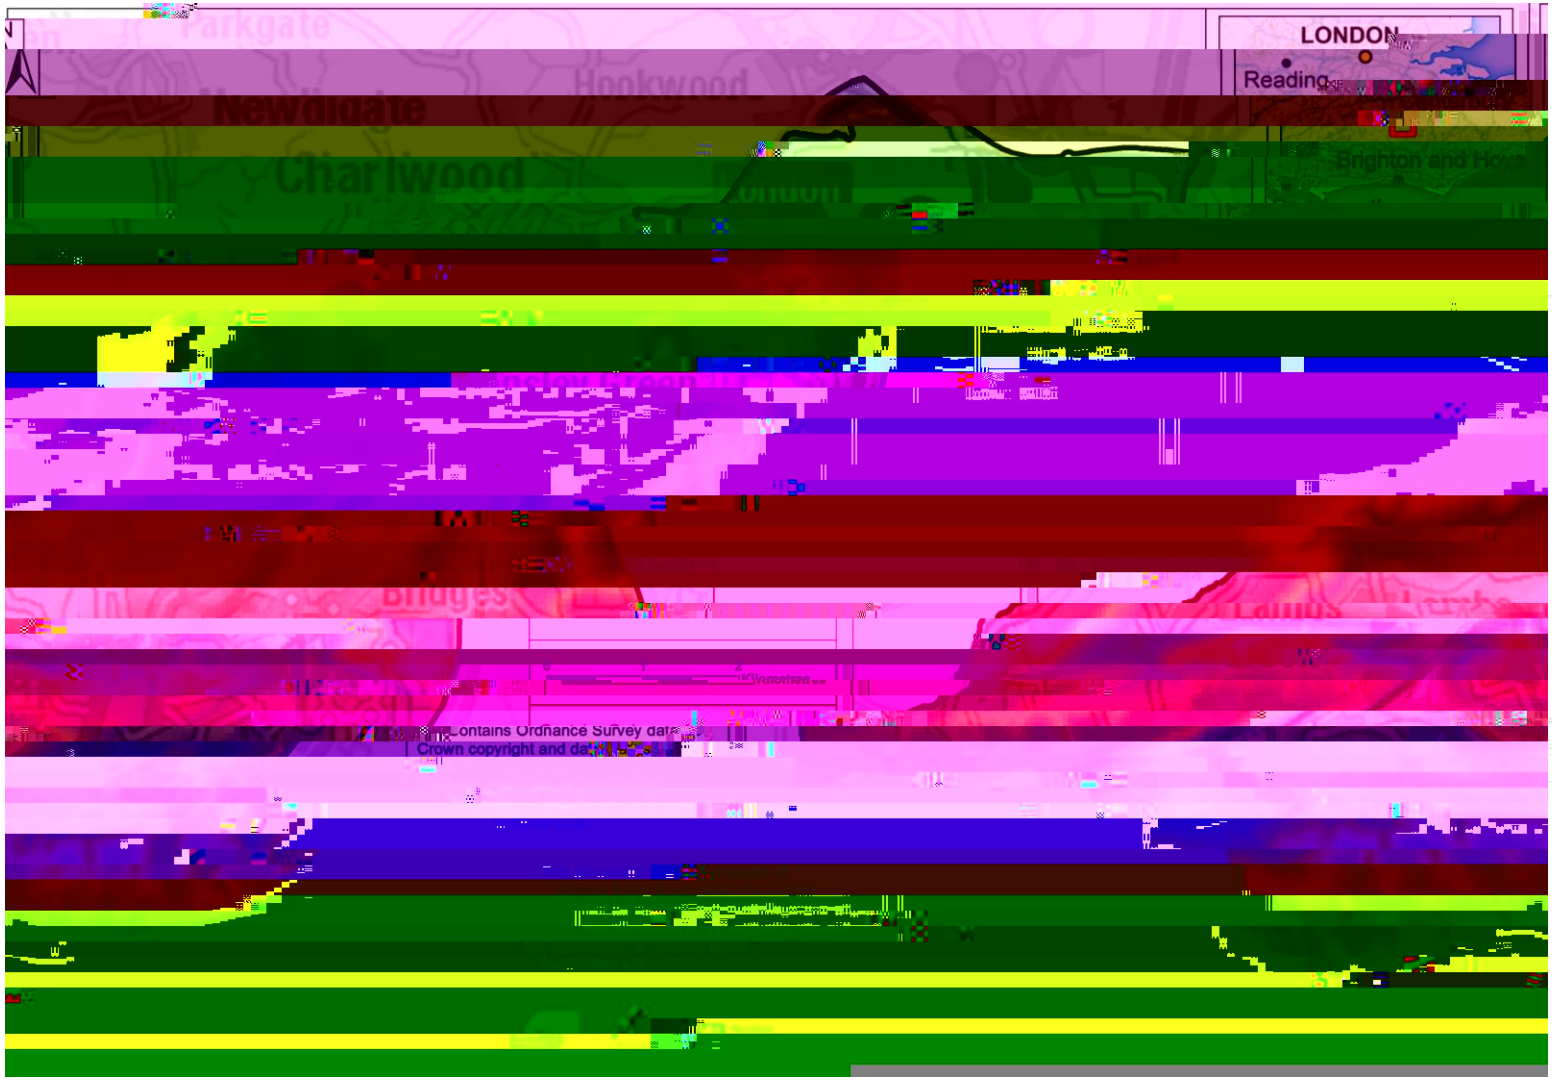

Figure 6-3:

Figure 6-4: Bedrock aquifer designations in the SFRA study area

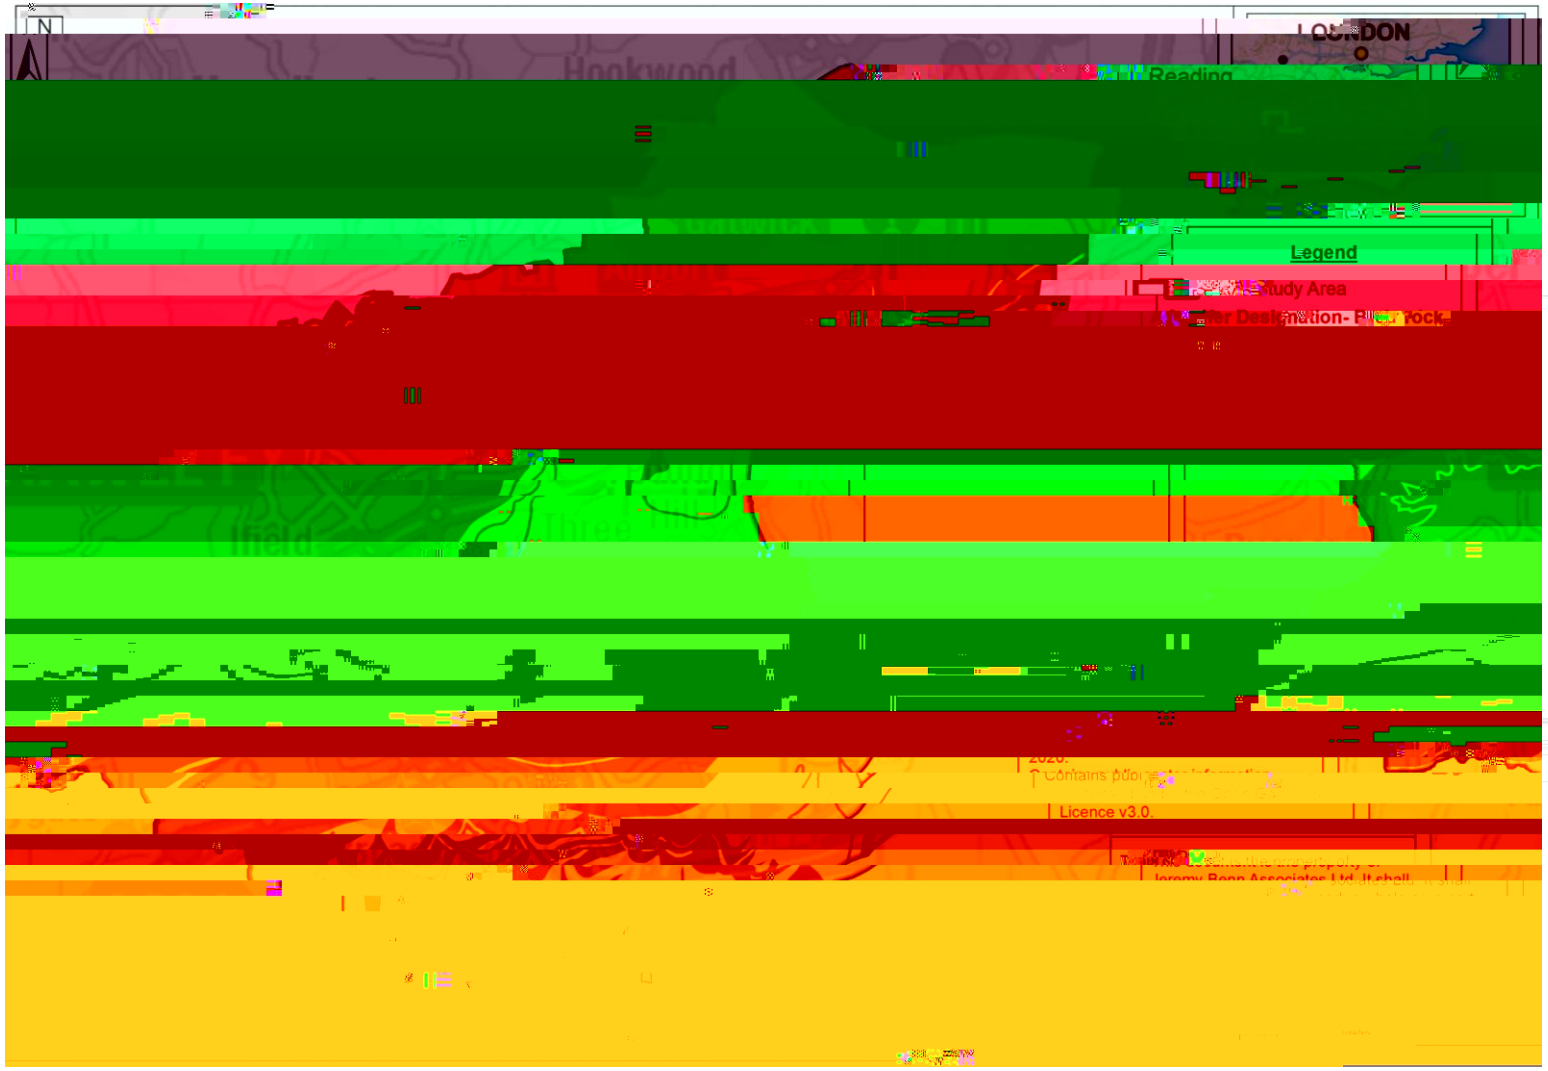

Figure 6-5: Superficial aquifer designations in the SFRA study area

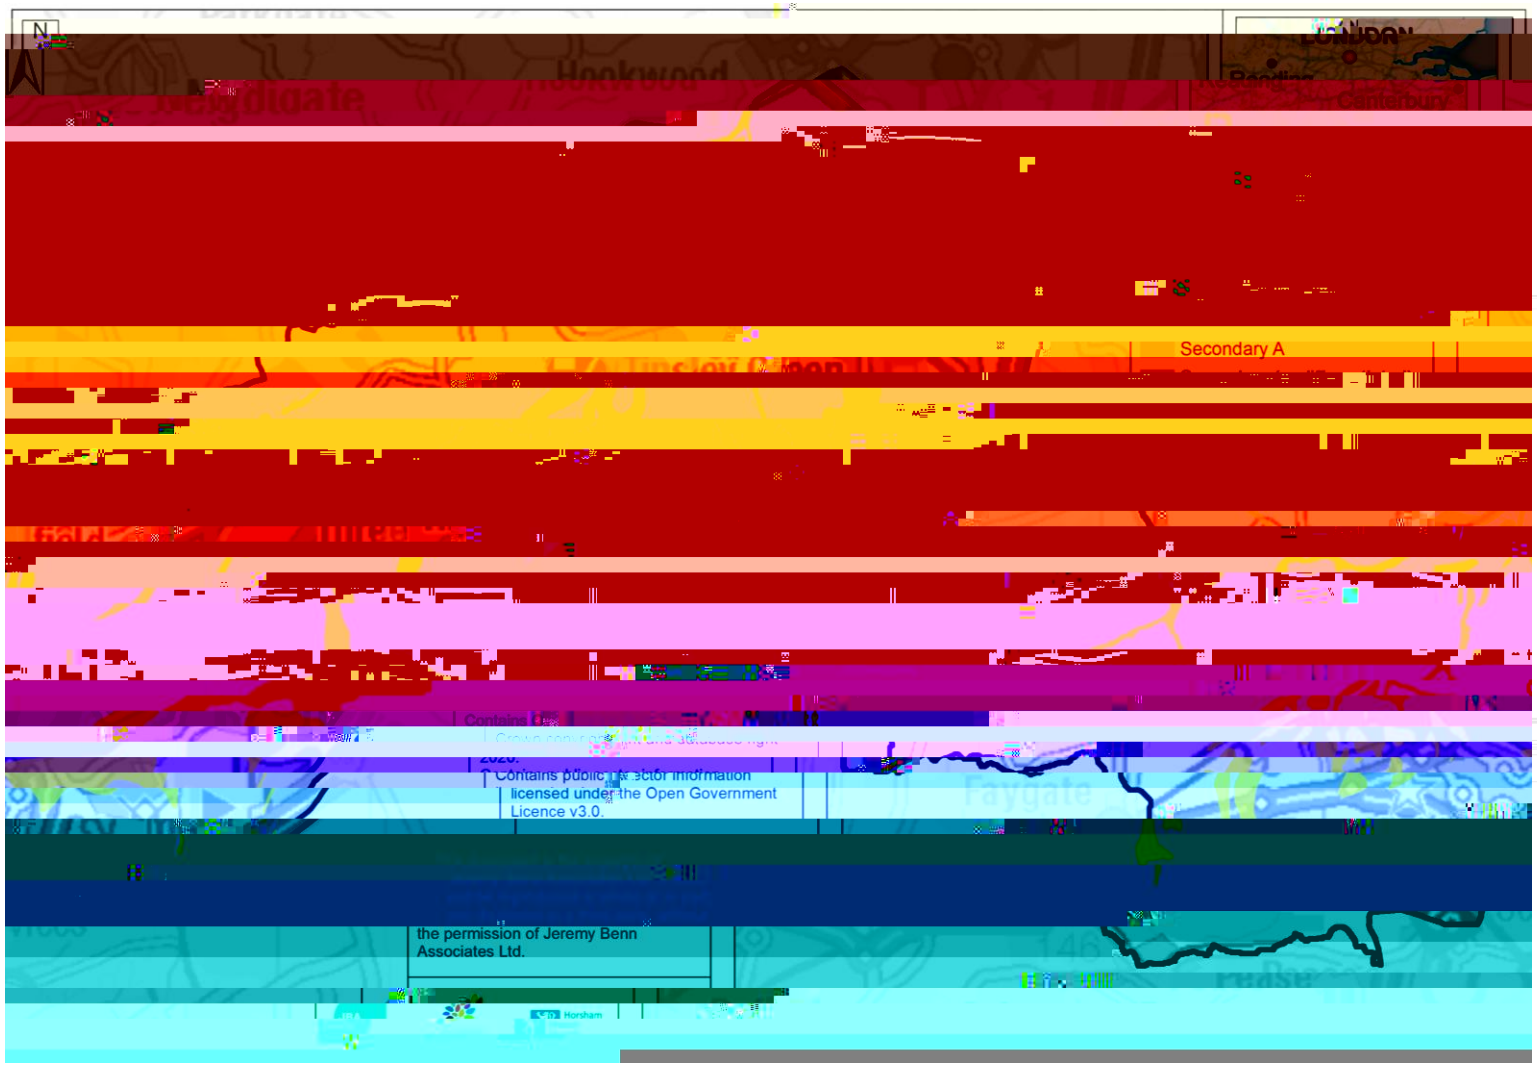

6.3 Watercourses

The largest watercourse flowing through the study area is the River Mole, which enters the north of Crawley before splitting into smaller tributaries including Gatwick Stream, Stanford Brook, Tilgate Brook, Mans Brook, Ifield Brook and Baldhorns Brook.

A summary of the main watercourses in the study area is provided below in Table 6-1. Mapping indicating the location of the Main Rivers and Ordinary Watercourses can be found in Appendix B.

Table 6-1: Watercourses and channels in the study area (based on WFD catchments)

Watercourse	Description
River Mole	The River Mole, which rises in Baldhorns Close, flows south towards Ifield where it is joined by a number of tributaries, before being directed clockwise round the perimeter of Gatwick Airport . The watercourse then flows out of Crawley to the north.
Gatwick Stream	Gatwick Stream is a tributary of the River Mole, that flows north from its source at Clay Lake, through Three Bridges before joining the River Mole north of Gatwick Airport.
Brook	the centre of Crawley near Northgate Avenue and flows north, through Manor Royal Business Park before joining the River Mole south of Gatwick Airport.
Stanford Brook	Stanford Brook is a tributary of Gatwick Stream. It enters the study area from the south east and flows north west through Maidenbower, before joining Gatwi ck Stream near Three Bridges.
Tilgate Brook	Tilgate Brook is a tributary of Gatwick Stream, that flows north east through Tilgate, from the southern boundary of the study area, before joining Gatwick Stream near Three Bridges.
Mans Brook	Mans Brook is a tributary of the River Mole, that flows north east from its source to the north of Ifieldwood, through Charlwood before joining the River Mole east of Gatwick Airport.
Ifield Brook	Ifield Brook is a tributary of the River Mole that drains Ifiel d Mill Pond . The tributary flows north through Ifield, before joining the River Mole to the east of Ifieldwood.
Douster Brook	The Douster Brook is a tributary of the Ifield Brook . It flows northwards from its source near P6 re .e W* 3u

6.5 Surface water flood risk

Crawley has previously been identified as an area with a particularly significant history of flooding, with surface water flooding occurring in Southgate, West Green, Langley Green and Broadfield during extreme rainfall events (e.g. June 2012) and long wet periods (e.g. Winter 2013/14).

The Risk of Flooding from Surface Water (RoFSW) map shows predicted flood extents that predominantly follow topographical flow paths of existing watercourses or dry valleys with some isolated ponding located in low lying areas and in lakes and ponds

ry of predicted flood risk to the key settlements in the study area

ement	Fluvial flood risk	Formal flood defences	Surface water flood risk	Susceptibility to groundwater flooding, according to GeoSmart map				
				Negligible risk	Low risk	Moderate	High	
Forge Wood	Forge Wood is located on the eastern bank of Gatwick Stream. Flood zones 2 and 3 are generally restricted to open land surrounding the channel in the west of the ward , though a number of Gatwick Airport South T							

Settlement	Fluvial flood risk	Formal flood defences	Surface water flood risk	Susceptibility to groundwater flooding, according to GeoSmart map				Reservoir inundation
				Negligible risk	Low risk	Moderate	High	
Furnace Green	Fluvial flood risk in Furnace Green is a resul t of Tilgate Brook and Gatwick Stream . Waterlea Meadows , in the east of the neighbourhood, is a high - risk area located within Flood Zone 3b . Residential properties around Furnace D rive, Sylvan Road and Wychwood Road are also at risk, situated within Flood Zones 2 and 3a.							

Settlement	Fluvial flood risk	Formal flood defences	Surface water flood risk	Susceptibility to groundwater flooding, according to GeoSmart map	Reservoir inundation

7 Fluvial defences

A high-level review of flood defences was carried out for this SFRA based on the Defences dataset, involving an interrogation of existing information on asset condition and standard of protection.

Defences are categorised as either raised flood defences (e.g. walls/embankments), Flood Storage Areas (FSAs) or channel maintenance

8

The NPPF states that a sequential, risk-based approach should be applied to try to locate more vulnerable land use away from flood zones, to higher ground, while more flood-compatible development (e.g. vehicular parking, recreational space) can be located in higher risk areas. However, vehicular parking in floodplains should consider the nature of parking, flood depths and hazard including evacuation procedures and flood warning. The nature of risk to water quality also needs to be considered and mitigated to ensure that accumulated hydrocarbons and other vehicle related pollutants are not released to the aquatic environment.

Waterside areas, or areas along known flow routes, can be incorporated into the masterplan as multi-functional green infrastructure, being used for recreation, amenity and environmental purposes, allowing the preservation of flow routes and flood storage, and at the same time providing valuable social and environmental benefits contributing to other sustainability objectives. Landscaping should ensure safe access to higher ground from these areas and avoid the creation of isolated islands as water levels rise.

8.4.2 Raised floor levels

The raising of internal floor levels within a development avoids damage occurring to the interior, furnishings and electrics in times of flood.

If it has been agreed with the Environment Agency that, in a particular instance, if the raising of floor levels is acceptable, the finished levels should normally be set to whichever is higher of the following:

- a minimum of 600mm above the 1% AEP fluvial event plus an allowance for climate change and an appropriate allowance for freeboard
- 300mm 0.66 d ipr set

However, the provision of funding by a developer for the cost of the necessary standard of protection from flooding or coastal erosion does not of itself mean the development is appropriate in flood risk terms, as other policy aims must also be met . This will include application of the NPPF sequential, and as necessary, exception tes ts . Funding from developers should be explored prior to the granting of planning permission and in partnership with the council and the Environment Agency.

The most

When redeveloping existing buildings, it may be acceptable to install pumps in basements as a resilience measure. However , for new development this is not

Figure 9-1: Four pillars of SuDS design (from The SuDS Manual C753 (2015))

All new major development proposals should ensure that sustainable drainage systems for the management of run-off are put in place. The developer is responsible for ensuring that the design, construction and future/ongoing maintenance of such a scheme are carefully and clearly defined, and a clear and comprehensive understanding of the existing catchment hydrological processes and existing drainage arrangements is essential.

9.4 Types of SuDS System

Ther-5(g)-3(dr)4oidrTypes of SuDS System

Figure 9-2: SuDS Management Train

9.4.2 Treatment

A key objective of the four pillars of SuDS is to provide the maximum improvement possible for the Management Train. In scope for treatment of pollutants within SuDS, CIRIA recommends [13] the following good practice is implemented in the treatment process:

1. Manage surface water runoff close to source:

9.5.1 Surface Water Advice Note – Using SuDS on new developments (June 2015)

When considering SuDS as part of a major planning application, local planning authorities need to satisfy themselves that th e minimum standard of operation (expected design and performance) is appropriate for SuDS and ensure through the use of planning conditions that clear arrangements are in place for their ongoing maintenance to ensure their effectiveness over the lifetime of the development.

The NPPF expects local planning authorities to give priority to ensurin g that flood risk is not increased by development, including through the effective use of SuDS by the developer, in determining planning applications. Where SuDS are used, it must be established that these options are feasible, can be adopted and properly maintained throughout the lifetime of the development, and would not lead to any other environmental problems. This is a material planning consideration for all major applications as of the 6 April 2015 and should therefore be given full consideration in the process of determining an application .

9.5.2 Non-Statutory

9.5.4 Groundwater Source Protection Zones (GSPZ)

The Environment Agency also defines Groundwater Source Protection Zones in the vicinity of groundwater abstraction points , as shown on Defra's MAGIC map. These areas are defined to protect areas of groundwater that are used for potable supply, including public/private potable supply, (including mineral and bottled water) or for use in the production o f commercial food and drinks , from any activity that may cause pollution . The G roundwater SPZ requires attenuated storage of runoff to

Surface Water NVZ an area of land where surface waters (in particular those us ed or intended for the abstraction of drinking water) are at risk from containing nitrate concentrations exceeding the 50 mg/l dictated by

(1991).

Eutrophic NVZ an area of land whe re nitrate concentrations are such that they could/will trigger the eutrophication of freshwater bodies, estuaries, coastal waters and marine waters.

The locations of the Nitrate Vulnerable Zones in the study area are shown in Figure 9-3.

Figure 9-3: Nitrate Vulnerability Zones in the SFRA study area

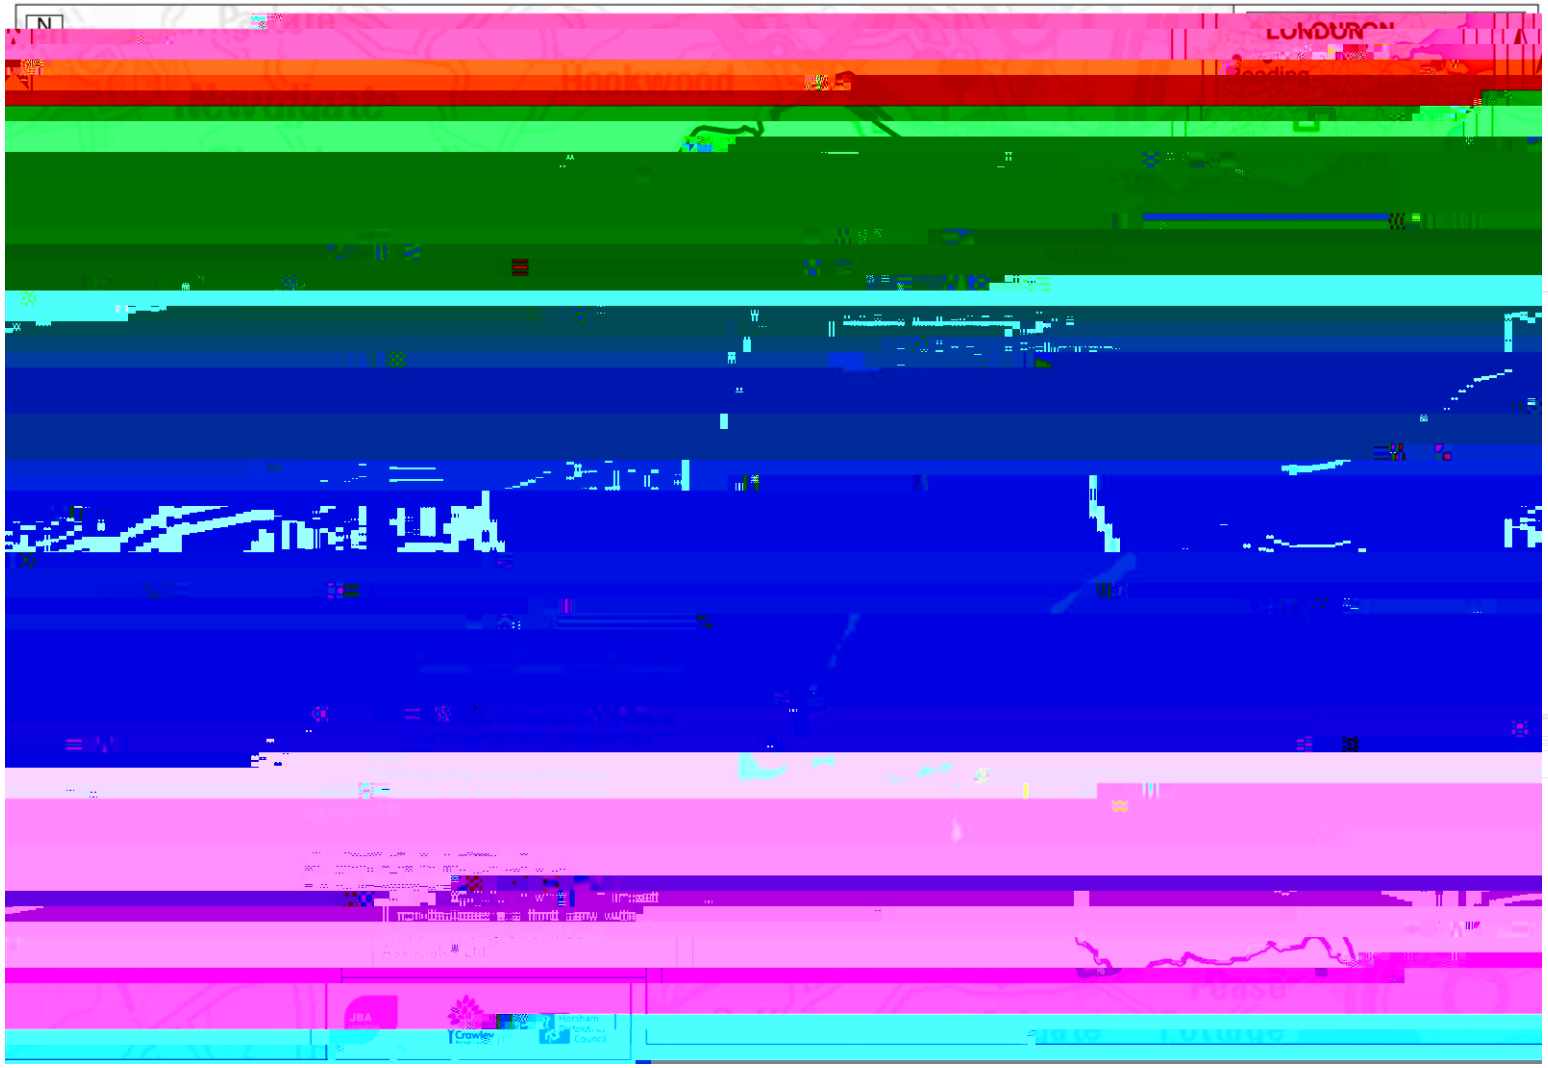

Table 10-1: Environment Agency Warnings

Flood Warning Symbol	What it means	What to do
	Flood Alerts are used to warn people of the possibility of flooding and encourage them to be alert, stay vigilant and make early preparations. It is issued earlier than a flood warning, to give customers advance notice of the possibility of flooding, but b efore there is full confidence that flooding in Flood Warning Areas is expected.	pBe prepared to act on your flood plan

Access routes should allow occupants to safely access and exit their dwellings in design flood conditions. In addition, vehicular access (no more than 300mm depth along access routes or 1.5m /s velocity) for emergency services to safely reach development in design flood conditions is normally required; and

Where possible, safe access routes should be located above design flood levels and avoid flow paths including those caused by exceedance and blockage. Where this is unavoidable, limited depths of flooding may be acceptable providing the proposed access is designed with appropriate signage etc. to make it safe. The acceptable flood depth for safe access will vary as this will be dependent on flood velocities and risk of debris in the flood water. Even low levels of flooding can pose a risk to people in situ (because of, for example, the presence of unseen hazards and contaminants in floodwater, or the risk that people remaining may require medical attention).

The depth, velocity and hazard mapping from hydraulic modelling , which will form part of the Flood Risk Assessment, should help inform the provision of safe access and egress routes.

As part of an FRA, the developer should review the acceptability of the proposed access in consultation with Crawley Borough and Horsham District Councils and the Environment Agency. Site and plot specific velocity and depth of flows should be assessed against standard hazard criteria to ensure safe access and egress can be achieved.

10.3.3 Potential evacuations

During flood incidents, evacuation may be considered necessary. The NPPF Planning Guidance states practicality of safe evacuation from an area will depend on [16]:

1. the type of flood risk present, and the extent to which advance warning can be given in a flood event;
2. the number of people that would require evacuation from the area potentially at risk;
3. the adequacy of both evacuation routes and identified places that people could be evacuated to (and taking into account the length of time that the evacuation may need to last); and
4. sufficiently detailed and up to date evacuation plans being in place for the locality that address these and related issues.

The vulnerability of the occupants is also a key consideration. The NPPF , through application of the Sequential Test aims to avoid inappropriate development in flood risk areas. However, it is possible that developments may contain proposals for mixed use on the same site. In this instance, the NPPF Planning Practice Guidance states that layouts should be designed so that the most vulnerable uses are restricted to higher ground which is at a lower risk of flooding, with development which has a lower vulnerability (parking, open space etc.) directed to the highest risk areas, unless there are overriding reasons to prefer a different location [17]. Where the overriding reasons cannot be avoided, safe and practical evacuation routes must be identified.

16 NPPF Planning Practice Guidance: Flood Risk and Coastal Change (paragraph 057, Reference ID: 7-057-20140306) March 2014

17 NPPF Planning Practice Guidance, Reducing the causes and impacts of flooding Paragraph: 053 Reference ID: 7-053-20140306

The Environment Agency and D efra provide standing advice for undertaking flood risk asses

10.3.5 Other sources of information

The joint guidance on flood risk emergency plans for new development which has been produced between the Environment Agency and the Association of Directors of Environment,

11 Strategic flood risk solutions

11.1 Introduction

Strategic flood risk solutions may offer a potential opportunity to reduce flood risk in the study area. The following section outlines different options which could be considered for strategic flood risk solutions. Any strategic solutions should ensure they are consistent with wider catchment policy and the local policies. It is important that the ability to deliver strategic solutions in the future is not compromised by the location of proposed development. When assessing the extent and location of proposed development consideration should be given to the requirement to secure land for flood risk management measures that provide wider benefits. Funding for these solutions could be sought via S106 agreements or the Community Infrastructure Levy (CIL).

11.2 Flood storage schemes

Flood storage schemes aim to reduce the flows passed downriver to mitigate downstream flooding. Development, particularly on greenfield land, increases the impermeable area within a catchment, creating additional and faster runoff into watercourses. Flood storage schemes aim to detain this additional runoff, releasing it downstream at a slower rate, to avoid any increase in flood depths and/or frequency downstream. Methods to provide these schemes include [19]

- enlarging the river channel;
- raising the riverbanks; and/or
- constructing flood banks set back from the river.

Flood storage schemes have the advantage that they generally benefit areas downstream, not just the local area.

11.2.1 Promotion of SuDS

By considering SuDS at an early stage in the development of a site, the risk from surface water can be mitigated to a certain extent within the site as well as reduce the risk that the site poses to third party land. Regionally, SuDS should be promoted as part of all new developments to ensure the quantity and quality of surface water is dealt with sustainably in order to reduce flood risk. The policies and guidance produced by WSCC as the LLFA (summarised in Section 9) should be used by developers to produce technically proficient and sustainable drainage solutions that conform with the non-statutory standards for SuDS (2015).

11.3 Natural Flood Management

Development can provide opportunities to work with natural processes to help reduce flood and erosion risk, benefit the natural environment and reduce costs of schemes. This is known as Natural flood management, a process whereby action is taken to mitigate flood risk by protecting, restoring and emulating natural processes. This

19 Environment Agency: Fluvial Design Guide

approach aims to reduce flow volumes and delay the arrival of peak flood flow downstream.

This requires integrated catchment management and the

planning would need to be undertaken to gain a greater understanding of the response to any proposed channel modification.

In 2011, the Environment Agency proposed the restoration of the reach of Gatwick Stream that flows through Gratton's Park. The restoration formed part of the mitigation and enhancement measures associated with the Upper Mole Flood Alleviation Scheme. The works were subsequently completed by Crawley Borough Council as part of its contribution to the scheme and involved the replacement of the existing straight concrete channel with a meandering earth channel to reconnect the river to the floodplain.

11.4 Structure Removal and / or modification (e.g. Weirs)

Structures, both within watercourses and adjacent to them can have significant impacts upon rivers. This can occur through alterations to the geomorphology and hydraulics of the channel through water impoundment, and through altering the sediment transfer regime, which over time can significantly impact the channel profile including bed and bank levels, alterations to flow regime and interruption of biological connectivity, such as the passage of fish and invertebrates.

Many artificial in channel structures (examples include weirs and culverts) are often redundant and / or serve little purpose, meaning that opportunities exist to remove them where feasible. The need to do this is heightened by climate change, for which

tec hniques, such as willow spiling, can be particularly effective. Live willow stakes thrive in the moist environment and protect the soils from further erosion allowing other vegetation to establish and protect the soils. Other approaches include the plant ing of brash or small trees, large wood, large trees and roots wads.

11.7 Green Infrastructure

Green infrastructure (GI) is a planned and managed network of natural environmental components and green spaces that intersperse and connect the urban centres, sub urbs and rural fringe . Green Infrastructure consist of:

Open spaces parks, woodland, nature reserves, lakes

Linkages River corridors and canals, and pathways, cycle routes and greenways

private gardens, street trees, verges and green roofs.

The identification and planning of Green Infrastructure is critical to achieving sustainable growth , and merits forward planning and investment as much as other socio-economic priorities such as health, transport, education and economic development. GI is also central to climate change action and is a recurring theme in planning policy. With regards to flood risk, green spaces can be used to manage storm flows and free up water storage capacity in existing infrastructure in order to redu ce risk of damage to urban property, particularly in city centres and vulnerable urban regeneration areas. Green infrastructure can also improve accessibility to waterways and improve water quality, supporting regeneration and improving opportunit ies for leisure, economic activity and biodiversity.

The adopted Crawley Borough Council Local Plan (2015) and Horsham District Council Local Plan (2015) both contain a policy on GI (Policy ENV1 and Policy 31 3(st)-10(r)3(i)5/F2 9

12 Level 1 summary assessment of potential development locations

12.1 Introduction

A total of 79 sites were provided by Crawley Borough and Horsham District Councils as shown in Figure 12-1, including 76 within Crawley Borough and 3 within Horsham District. The sites that were screened include potential development locations, existing committed development locations, and development allocations and regeneration areas that were adopted in the most recent Local Plans. These sites

Figure 12-1: Mapping of Level 1 sites to be screened

12.2 Overview of risk at identified sites

A summary of flood risk at each of the sites in light of the screening is provided below:

Flood Zone composition is varied across the sites. However, the majority of the sites are located mostly within Flood Zone 1, with 63 sites completely located within Flood Zone 1

14 sites are partially located within Flood Zone 2

9 sites are partially located within Flood Zone 3a

10 sites are at least partially located within Flood Zone 3b

16 sites are predicted to be at risk of fluvial flooding in the future due to climate change

68 sites are predicted to be at risk of surface water flooding

7 sites intersect the Environment Agency's historic flood outlines

5 sites are predicted to be at a moderate risk of groundwater flooding

No sites are located within 50m of an incident recorded by WSCC during the 2012 flood event

12.3 Sequential Testing

The SFRA does not include the Sequential Test of the development sites that were

Table 12-1: Individual components of the relative cumulative impacts score for historic and predicted flood risk (per WFD catchment)

	oint core	% of catchment within the combined 100-year fluvial and pluvial flood risk extent	% in percentage of catchment at risk during the combined 1000-year pluvial and fluvial flood risk extent	% of properties within the combined 100-year fluvial and pluvial flood risk extent	% increase in percentage of properties at risk during the combined 1000-year pluvial and fluvial flood risk extent	

Table 12-2

Figure 12-2: Mapping of the Cumulative Impact Assessment results

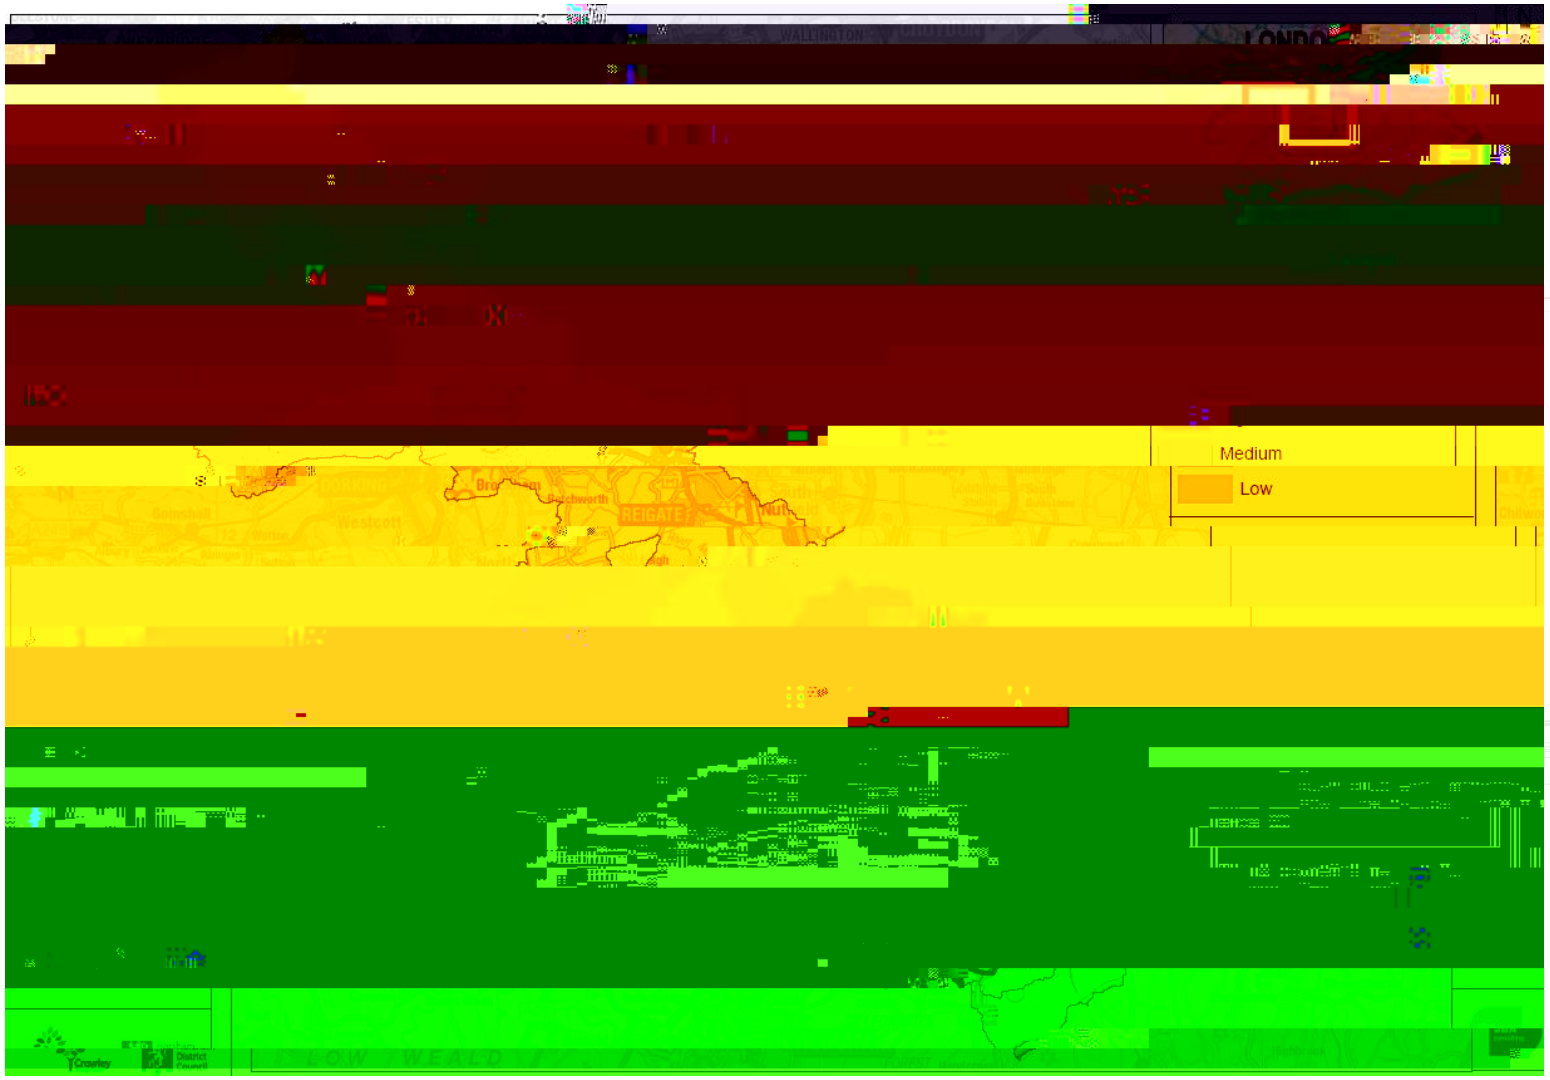

13 Summary

13.1 Overview

This Level 1 SFRA delivers a strategic assessment of all sources of flooding in the Study Are

14 Recommendations

A review of national and local policies has been conducted against the information collected on flood risk in this SFRA. Follo wing this, several recommendations have been made for Crawley Borough and Horsham District Councils to consider as part of

Use of the SuDS management train to prevent and control pollutants to .

SuDS are to be designed so that they are easy to maintain, and it should be set out who will maintain the system, how the m aintenance will be funded and should be supported by an appropriately detailed maintenance and operation manual.

Early consideration of SuDS within master planning will typically allow a more effective scheme to be designed .

West Sussex County Council shou ld be consulted at an early stage of development to ensure that SuDS are implemented and designed in response to site characteristics and policy factors.

14.1.3 Reduce surface water runoff from new developments and agricultural land

SuDS should be considered and implemented as part of all new development, in line with the West Sussex LLFA Policy for the Management of Surface Water.

Space should be provided for the inclusion of SuDS on all allocated sites and outline proposals .

Promote biodiversity, habitat improvements and Countryside Stewardship schemes to help prevent soil loss and to reduce runoff from agricultural land .

14.1.4 Enhance and restore river corridors and habitat

Assess condition of existing assets and upgrade, if required, to ensure that the infrastructure can accommodat e pressures / flows for the lifetime of the development .

Natural drainage features should be maintained and enhanced .

Identify opportunities for river restoration / enhancement to make space for water .

A presumption against culverting of open watercourses except where essential to allow highways and / or other infrastructure to cross, in line screen and outfall manual , (C 786 PR) and to restrict development over culverts.

There should

pumps . The design flood level should be determined if the pumps were to fail; if the attenuation storage w as full, and if a design storm occurred .

An emergency overflow should be provided for piped and storage features above the predicted water level arising from a 100 -year rainfall event , inclusive of climate change and urban creep allowances .

Consideration and incorporation of flood resilience measures up to the 1 in 1,000 -year event .

Ensure robust emergency (evacuation) plans are produced and implemented for major developments .

Increase awareness and promote sign -up to the Environment Agency Flood Warnings Direct (FWD) within the study area .

14.2 Local Plan Policies

The current Draft Crawley Borough Local Plan contains policies relating to flood risk management and development. These include the Strategic Policy EP1: Development and Flood Risk, which covers the need to account for flood risk at all stages in the planning process and to build in resilience to ant icipated climatic changes, including the use of sustainable drainage systems (SuDS). In addition, the Non -Strategic Policy EP2: Flood Risk Guidance for Household Development and Minor Non -Residential Extensions, details the requirements for Flood Risk and Resilience statements for any householder development, minor non -residential extension or minor alterations to a property within Flood Zone 2 and 3a.

The current Draft Horsham District Local Plan includes Strategic Policy 40: Flooding, which covers similar topics regarding the need to account for flood risk at all stages in the planning process, in accordance with the NPPF, and the use and suitability of SuDS.

A review of these policies has been carried out against the findings of this SFRA. The following additional policies and updates to existing policies are recommended for the Local Plan s:

14.2.1 Buffer Strips Policy

The provision of buffer strips is important in preserving watercourse corridors, flood flow conveyance and future watercourse maintenance and improvement. It also enables the avoidance of disturbing ecology and the structural integrity of riverbanks.

Developers should:

Not build within 12m from the edge of bank of any Ordinary Watercourse within the District

Not build within 8m from the edge of bank of any Main River within the District in accordance with the Environment Permitting Regulat ions (2016)

Seek opportunities on a site by site basis to increase these buffer distances

climate change.

14.2.2 Sustainable Drainage Policy

Space should be provided for the inclusion of SuDS on all allocated sites and outline proposals, including non -major development.

Planning applications for phased developments should be accompanied by a Drainage Strategy, which takes a strategic approach to drainage provision across the entire site and incorporates adequate provision for SuDS within each phase.

Opportunities should be considered to integrate SuDS into green infrastructure and open spaces.

14.3 Recommendations from the cumulative impact analysis

Policy Recommendation 1: High risk less urbanised catchments with localised flood risk issues

This policy relates to high risk catchments e.g.

Burstow Stream

This policy is targeted towards a less urbanised catchment with localised flood risk issues. Mapping of this catchment can be found in Figure 12-2.

To minimise cross boundary issues, the recommended policy is to:

Work closely with neighbouring Local Authorities and the Lead Local Flood Authority to develop complementary Local Planning Policies for the Burstow Stream catchment

Undertake more detailed drainage strategy work as part of a Level 2 SFRA or detailed local area Strategic Drainage Study to consider further how the cumulative effects of potential peak rates and volumes of water from development sites would impact on peak flows, duration of flooding and timing of flood peaks on receiving watercourses. Such studies could be used to justify greater restrictions / enforce through Local Planning Policy development site runoff rates and volumes specific to each catchment that are over and above those required by National and Local SuDS Standards. They could also identify where there are opportunities with allocated sites to provide off-site betterment e.g. 1 0 595.32871 0 595.32l.21 871 0 595.32 842is

River Mole (upstream of Horley),

Tilgate Brook and Gatwick Stre am at Crawley

Ifield Brook

This policy is targeted towards catchments where a medium score has been identified based on a high amount of development . Mapping of these catchments can be found in Figure 12-2

APPENDICES

A Historic flooding

B Watercourses

C Fluvial Flood Zones

D Fluvial climate change flood risk map

E Surface water flood risk map

F Surface water climate change flood risk map

G GeoSmart Groundwater Flood Map

H Reservoir inundation map

I Flood defences

J Flood Alert and Flood Warning Areas

K Level 1 site screening table

L Guide to using technical data

Offices at

Coleshill
Doncaster
Dublin
Edinburgh
Exeter
Glasgow
Haywards Heath
Isle of Man
Limerick
Newcastle upon Tyne
Newport
Peterborough
Saltaire
Skipton
Tadcaster
Thirsk
Wallingford
Warrington

Registered Office
South Barn
Broughton Hall
SKIPTON
North Yorkshire
BD23 3AE
United Kingdom

+44(0)1756 799919
info@jbaconsulting.com
www.jbaconsulting.com
Follow us:

Jeremy Benn Associates L imite d

Registered in England 3246693

JBA Group Ltd is certified to:
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007